RESIDENTIAL PLASTIC SEATS






ONE HINGE TWO FEATURES

Seats shall be No. 300SLOW as manufactured by Church Seats. Seats shall be heavy weight and injection molded of solid plastic. Seats shall be closed front with cover for regular bowl and feature large molded-in bumpers. Color matched hinges contain stainless steel pintles, non-corrosive toptightening bolts, wing nuts, no-slip washers with Slow-Close[™] and Lift-Off[™] features. The "locked-in" hinge design prevents wobbling. The molded-in bumpers provide easy cleaning. Color to be

_____. (Specify white or fixture manufacturer's color.)

MODEL 300SLOW

- REGULAR SEAT CLOSED FRONT WITH COVER
- SOLID PLASTIC
- SLOW-CLOSE[™] AND LIFT-OFF[™] HINGE



Ring thickness is 5/8" Ring thickness including the bumper is 7/8" Height of the seat with cover is 2 7/16"




TWIST HINGE TO RELEASE SEAT



LIFT-OFF™ FOR EASY CLEANING FEATURE



SLOW-CLOSE™ FEATURE

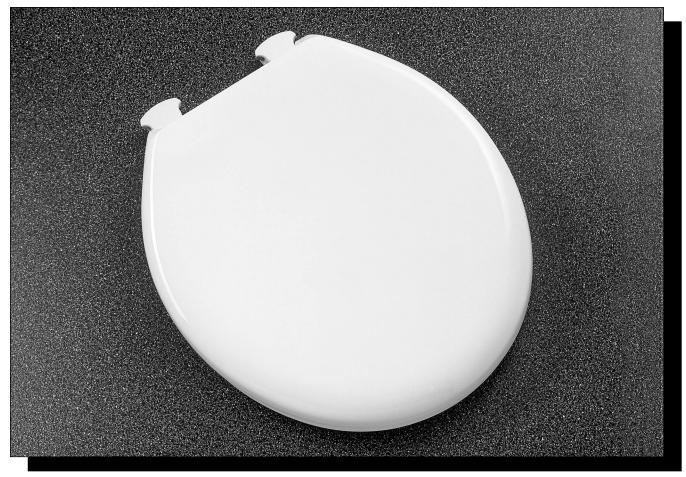

Church Seats, Sheboygan Falls, WI 53085 Phone: 920-467-2664 or 800-233-7325 Fax: 920-467-8573 www.churchseats.com